



REQUEST FOR PROPOSAL

FOR

Construction of Storage Tank, and Gabion Protection Bund, Fodder seed, and Fruit tree distribution and Rehabilitation of traditional Irrigation Channel Kondos District, Ghanche Gilgit Baltistan

1. **Introduction:**

World-Wide Fund for Nature Pakistan (WWF-Pakistan) under National Competitive bidding (“NCB”) has a requirement for the services of one qualified contractor to provide services/ Material for the Flood Rehabilitation Works after 2025 floods in Kondos Village District Ghanche.

Scope of Work

The scope of work includes construction and rehabilitation activities in Kondos, District Ghanche, including excavation, foundation works, and Gabion wall construction.

The contractor shall supply all materials listed in the BOQ, including but not limited to:

- Askari cement
- Sand and coarse aggregates (16–20 mm)
- Hard stone for gabion walls
- Hot-dip galvanized iron wire (SWG #8, 250 g/m² zinc coating)
- HDPE pipes (50 mm and 32 mm)
- Gate valves (90 mm and 63 mm)
- Alfalfa seed
- Plantation stock (cherry, walnut, and apple plants)

The contractor should also provide skilled and unskilled labor, necessary tools and equipment, and transportation of materials from Skardu to Kondos.

All materials must meet the required specifications and quality standards defined by the engineering team and referenced in the drawings and specifications

S. No	Activity	Region	District	Village	Coordinates
1.	Construction of Storage Tank and Gabion Bund, Fodder seed distribution, Fruit tree distribution and Rehabilitation of traditional Irrigation Channel Kondos	Kondos, Ghanche, Baltistan Region	Ghanche	Kondos	35.268840, 76.693828

2. **Submission of Bids:**



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FEROZEPUR ROAD LAHORE

Vendor/contractor shall submit the Technical and Financial Proposal in Single Sealed Envelope having mentioned the following:

- **Title of Procurement to Be Clearly Mentioned on the Sealed Envelope:** “Flood Rehabilitation Works at Kondos, District Ghanche”.
- Purchaser Address as mentioned in 2.3

2.1 Only one rate should be quoted for the item, and a vendor avoids giving any alternate quote.

2.2 Quotation must be typed or written in indelible ink and should be signed by an authorized representative. Without a signature and date on the Form of Quotation, the quotation shall not be considered further. All pages of the submitted quotation(s) where entries or amendments have been made, should be signed or initialed by the person signing the quotation.

2.3 A vendor shall submit a Price Quotation, on their letterhead, duly signed, and stamped by hand on a Sealed envelope. The quotation should be addressed and delivered to the following official named official at the address mentioned underneath:

Name: Assad Ullah
Designation Head Procurement & Consultancies

Purchaser’s Address : World Wide Fund for Nature,
Inside Ali Institute of Education, Ferozpur Road Lahore
P.O Box 5180

Telephone : 0423-5465983

Email : Assad Ullah <assadullah@wwf.org.pk>

For any queries, please write To: Zahid Hussain, zhussain@wwf.org.pk

CC: Assad Ullah, assadullah@wwf.org.pk and Syed Amjad Ali Shah, saashah@wwf.org.pk.

2.4. The bids must be delivered to the authorized official at the address mentioned above on or before **10th June 2026 by 5:00 PM**. Late submissions will not be entertained.

3. Requirements:

The vendor/contractor should have a proper business address and office/shop besides complying with the following eligibility requirements through documentary evidence, to be submitted along with their Quotation:

- a) The firm/company must be registered with Pakistan Engineering Council with active registration for the year 2025-2026 (Category C-5 and above with relevant Works codes (CE01, CE04, CE09, CE10, BC02))
- b) The bidder must be registered with Income Tax Department. (Not Applicable for GB based vendors)
- c) The bidder must be registered with Sales Tax Department. (Not Applicable for GB based vendors)
- d) The bidder must provide Proof of Active Taxpayer Income & Sales Taxes. (Not Applicable for GB based vendors)



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FEROPUR ROAD LAHORE

- e) Similar projects implemented in GB, such as Construction of Gabion Wall & Storage Tank, Rehabilitation of Irrigation channel, fodder and fruit tree distribution. The bidders must provide evidentiary documents (Work/purchase Order) regarding similar nature of works with proof. Preference will be given to the bidders having local construction experience of 5 years.
- f) Bidders should provide valid Bank Account details which should not be different to the firm's registered name.
- g) The bidder should have a local Civil Engineer in the team to provide support.
- h) The bidder will provide list of machinery for related works like tractor, Mixer Machine etc. WWF team will verify the list.

A vendor/contractor shall be selected as per the lowest evaluated responsive quotation(s) provided such bidder meets the qualification/eligibility requirements, referred to above.

4. Additional Documentations:

Following additional documents are required and would be used for **Technical/ Financial Evaluation:**

- a) Signed/Stamped copy of this RFP
- b) Technical proposal of as per Technical Specification/TORs at **Annex-A**
- c) Financial proposal with unit rates and total cost of work (Cost must be exclusive of all taxes) as per **Annex-B**
- d) Company Profile
- e) Details of Leaflets/Brochures (If Any)

5. Validity of Quotations:

Bids shall remain valid for at least **90 days** from the date of submission of the quotation, which may be extended based on mutual discussion. A bid valid for a shorter period may be considered non-responsive.

6. Purchaser Right:

WWF-Pakistan reserves the right to accept or reject any bid, to annul the bidding process, and to reject all bids at any time before contract award, without thereby incurring any liability to the affected Bidder or bidders. The Purchaser will inform the affected Bidder or bidders of the grounds for the Purchaser's action if so requested, but the Purchaser shall not be required to justify the grounds.

6.1 Any bidder, if found engaged in corrupt or fraudulent practices (including collusion/polling will be declared ineligible either indefinitely or for a stated period.

6.2 WWF-Pakistan also reserves the right to increase, decrease, delete, or modify the quantity to be delivered before the issuance of a "Purchase/Supply Order" to the "Lowest Evaluated Bidder.

Regards,

Name: Zahid Hussain
Designation: Provincial Coordinator
Civil/Environment



Technical Specifications/Terms of Reference/BOQs/Designs

i) Following are the detailed Technical Specification and TORs:

a. Specific Tasks:

The activity focuses on flood rehabilitation work including multiple components such as Construction of Gabion Wall, Construction of Storage Tank, Supply of HDPE Pipe and Plantation (Fodder seeds and Fruit Plants).

The construction work includes the provision, transportation, and installation of essential construction materials such as cement, wood, fine and coarse aggregates.

• **Material Transportation and installation**

The Contractor shall be fully responsible for the delivery, transportation, and installation of all materials, including cement, fine and coarse aggregates including shuttering material.

• **Material Quality Assurance:**

The Contractor must ensure that all supplied materials meet the required specifications, standards, and quality criteria outlined in the BOQ and technical guidelines. The vendor must provide lab reports against the GI wire through PCSIR lab, which will be cross verified by the technical team and the cost for cross verification will be the responsibility of the vendor.

• **Inspection and Acceptance:**

The Contractor shall ensure fault-free operations and installation. The Purchaser's Inspection Committee will inspect all supplied materials and completed works. The decision of the inspecting authority regarding approval or rejection of materials and works shall be final and binding on all parties.

• **Operation & Maintenance Period:**

A defect liability period of six (06) months shall be observed, during which the Contractor shall provide free-of-cost (FOC) operation and maintenance services. This includes rectification of any defects in civil works, gabion structures, HDPE pipelines, valves, and associated components, as well as any necessary repairs or adjustments to ensure proper functionality and durability.

• **Design Review and Consultation:**

The Contractor shall review existing designs, drawings, estimates, and construction requirements related to the Construction of Storage Tank, Fodder seed distribution, Fruit tree distribution and Rehabilitation of traditional Irrigation Channel in consultation with the designated technical team.

• **Labor Arrangements:**

The Contractor is responsible for organizing all necessary skilled and unskilled labour required for construction of storage tank, rehabilitations of traditional irrigation work,



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FEROZEPUR ROAD LAHORE

fodder seed distribution, fruits trees distribution and transportation of all materials to and across the site.

- **Site Commitment:**

The Contractor must confirm their willingness and commitment to execute the proposed activities at the site(s) identified by WWF-Pakistan.

- **Progress Reporting:**

The Contractor shall submit weekly and monthly progress reports detailing work status, material delivery, assembly, and overall site developments.

- **Coordination and Facilitation:**

The Contractor shall facilitate WWF-Pakistan's Field Officer and Monitoring Teams throughout the duration of the intervention until successful completion of all activities.

- **Project Completion Timeline:**

The Contractor shall complete the project as per timeline defined in agreement.

- **Project Monitoring:**


The Vendor shall be responsible for ensuring fault-free operation of all supplied items and executed works. The Purchaser's Inspection Committee of WWF-Pakistan will inspect both the supplied materials and the progress of work. The Committee's decision regarding acceptance or rejection shall be final and binding on all parties.



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FERAZEPUR ROAD LAHORE

a. Construction of Gabion Wall


Sr#	Item Name	Specification	Units	Quantity	Unit Rate (PKR)	Amount (PKR)
1	Excavation (foundation of Gabion Wall)	Excavation (foundation of Gabion Wall)	cft	5000		
2	Skilled Labour for the construction of Gabion Wall)	Skilled Labour for the construction of Gabion Wall)	Person	150		
3	Unskilled Labour for the construction of Gabion Wall	Unskilled Labour for the construction of Gabion Wall	person	150		
4	G.I Wire	Hot dip Galvanized Iron Wire with 250 g/sq-meter zinc coating and Standard Wire Guage (SWG)- # 8 (0.16 Inches or 4.064mm Dia)	Sft	18200		
5	Stone	Stone (hard stone 1.5 length, 10" thickness)	load	419		
6	Pick axe	Pick axe (2.5'wooden handle,1.5 kg weight)	NO	8		
7	Hammer	Hammer (5kg weight)	NO	8		
8	Layout rope	Layout rope (3mm macrame rope)	Rft	466		

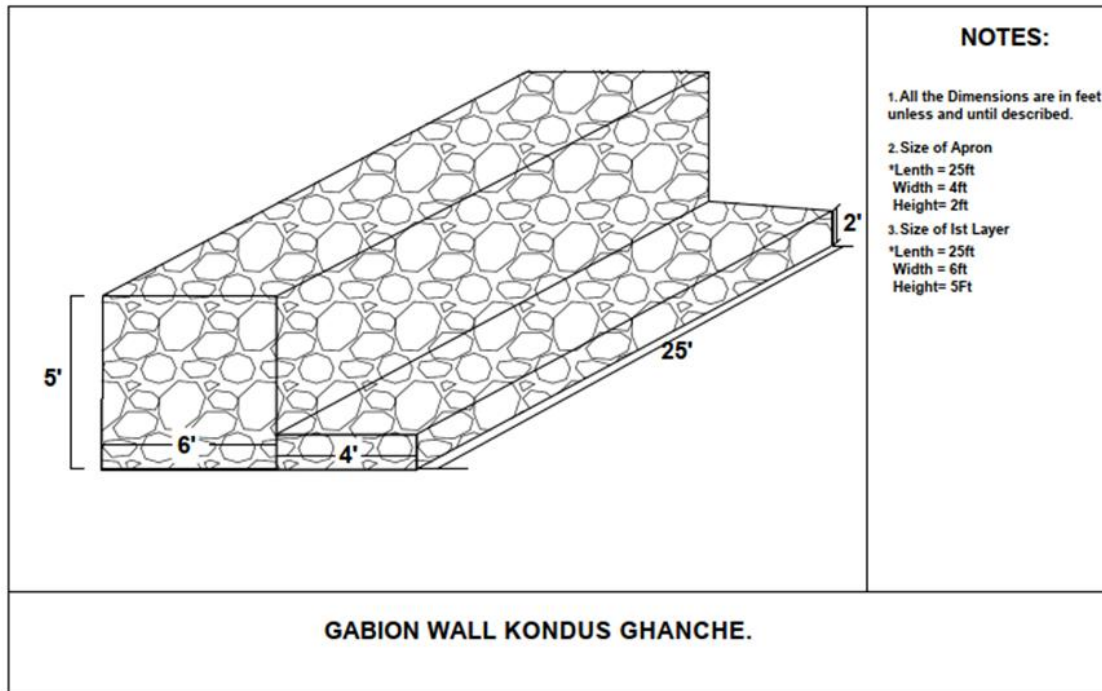

b. Rehabilitation of Irrigation Channel

Sr#	Item Name	Specification	Units	Quantity	Unit Rate (PKR)	Amount (PKR)
1	Unskilled Labour Charges for Excavation of foundation(channel)	600' x 3' x 2'	Cft	6000		
2	Askari Cement	Ordinary Portland Cement (50kg)	Bags	502		
3	Sand Tractor Load	Sand Tractor Load 63 cft (6'x4.2'x2.5')	Trips	30		
4	Coarse Aggregate Tractor load	Coarse Aggregate (16mm to 20mm) (6'x4.2'x2.5')	Trips	60		
5	Mixer machine	Concrete mini mixer Machine	hours	80		
6	shuttering Plate	Steel Plate 3' x 5'	No.s	18		
7	Unskilled Labour	Unskilled Labour Per day	days	140		
8	Skilled Labor	Skilled Labor Per day	days	140		
9	Transportation of cement	Askari 50kg/ bag	Truck/Trips	1		

"Construction of Lined Channel at Kondus"

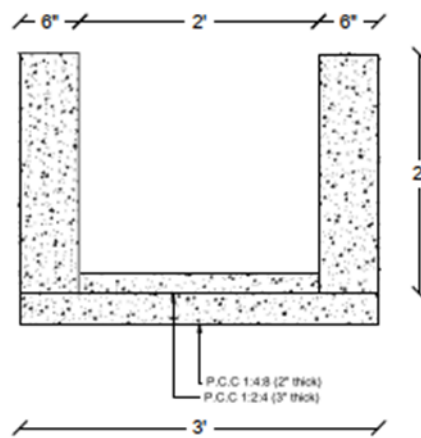



Length of Channel = 600 Rft

c. Construction of Storage Tank

Sr#	Item Name	Specification	Units	Quantity	Unit Rate (PKR)	Amount (PKR)
1	Cement	Askari Cement @ 50kg/bag	Nos	167		
2	Sand	Sand Tractor Load @ 50 cft/load	Load	12		
3	Coarse	Coarse Aggregate (16mm to 20mm) @50cft/load	Load	4		
4	Stone	Stone Tractor Load @45cft/load	Load	26		
5	Gate Valve 90 mm	Gate Valve for Washout (90mm)	Nos	1		
6	Gate Valve 63 mm	Gate Valve to regulate supplies (63mm)	Nos	1		
7	Skilled Labour	Skilled Labour	Nos	70		

8	Unskilled Labour	Unskilled Labour	Nos	70		
9	Transportation cost	Transportation of cement Skardu to Kondos Ghanche Mazada	trip	6		
10	HDPE Pipe 50 mm	HDPE Pipe 50 mm for school	feet	2000		
11	HDPE Pipe 32 mm	HDPE Pipe 32 mm for school	feet	1000		

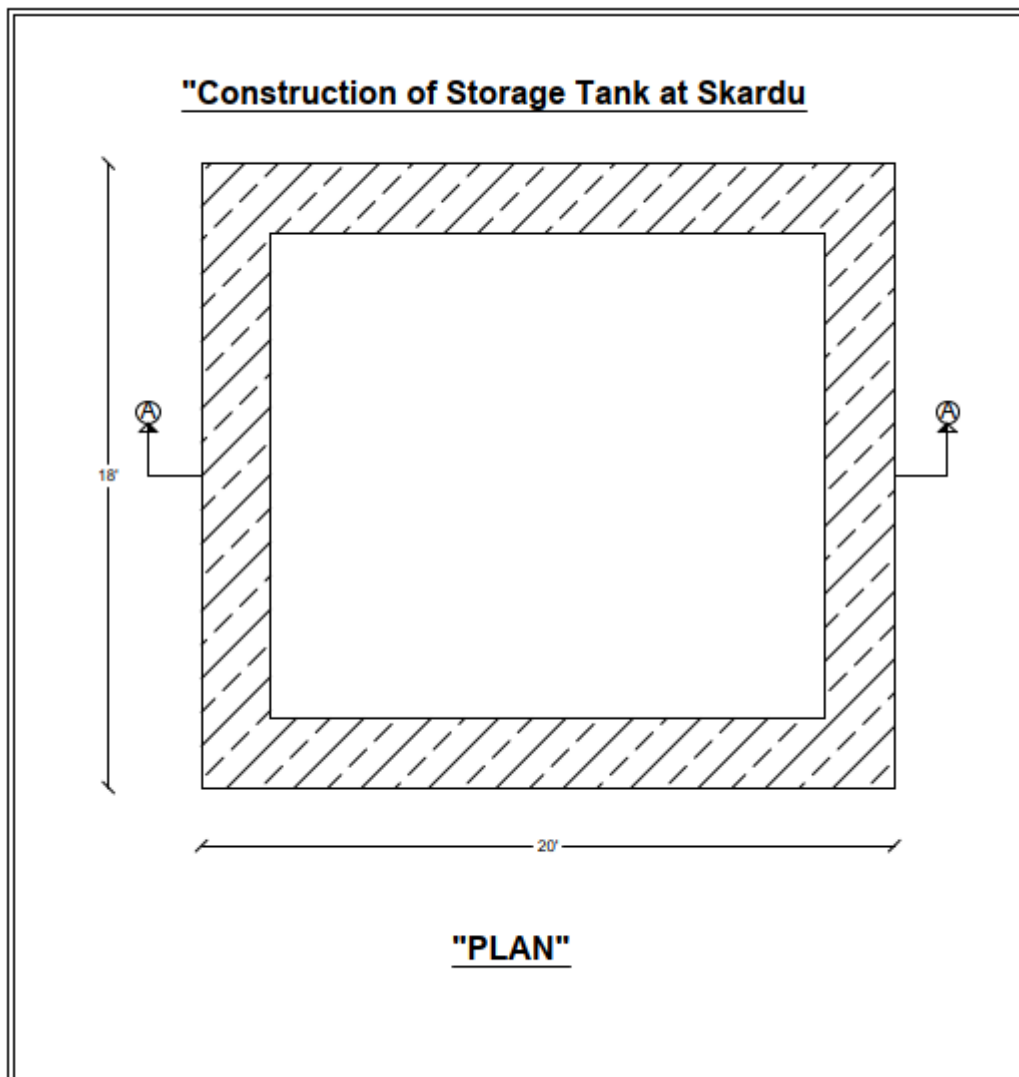

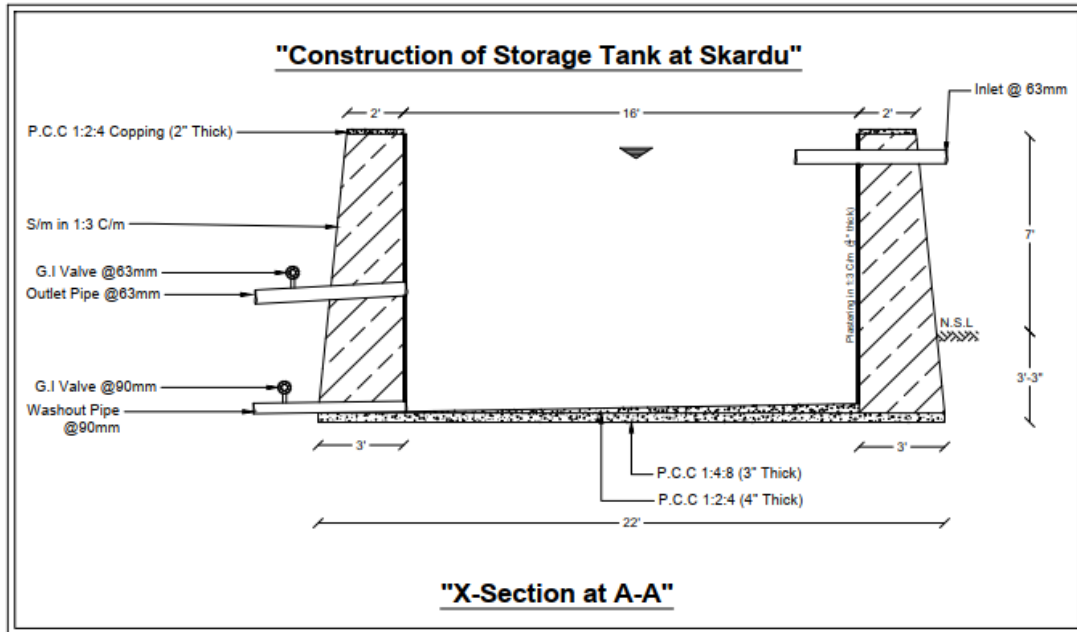

d. Distribution of Fruit Trees

Sr#	Item Name	Specification	Units	Quantity	Unit Rate (PKR)	Amount (PKR)
1	Cheery	Cheery 3 years, and 5 feet height grafted with transportation cost	No	200		
2	Walnut	Walnut 5 feet height local with transportation cost	No	200		
3	Apple	Apple 3 years, and 5 feet height grafted with transportation cost	No	200		
4	Alfalfa Seed	alfalfa Seed	Kg	180		



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FEROZEPUR ROAD LAHORE

i) Following are the detailed Technical Specification and TORs (Work Specifications):

Sr#	Item Name	Specification
1	Fruit Trees	<ul style="list-style-type: none">Cheery 3 years, and 5 feet height graftedWalnut 5 feet height localApple 3 years, and 5 feet height grafted
2	Fodder seeds	<p>Purity: >90% to 99%</p> <p>Germination Rate: 80% - 90% minimum</p> <p>Moisture Content: 8 - 10% for medium-term storage; <8% for long-term storage</p> <p>Physical Condition: Free from damaged/diseased seeds, weed seeds, and inert materials</p> <p>Age: Seed lots should be less than 1 year from harvest</p>

Notes for Plantation:

- i- Procure, check quality, delivery, transportation at the site shall be the responsibility of the supplier/Contractor.
- ii- Quotation provider will be responsible for fault-free operations. Purchaser Inspection committee will carry out the inspection of the items supplied. The decision of the inspecting authority regarding approval or rejection of the work will be final and binding to all concerned.
- iii- The **Defect Liability Period** of the Activity shall be **180 Days** against which the Supplier/Contractor shall provide FOC Services and Rectification if any and when required. For which 5% of total agreement value will be released after 180 days of completion of work.
- iv- Delivery/Implementation Timelines for this project are approximately forty-five **days** from the signing of the agreement.
- v- The Vendor should have the relevant experience.
- vi- The Vendor should have required machinery available for the site etc.
- vii- The Vendor must ensure HSSE requirements and methodology during execution of work as per the site and is responsible for the health and safety of their workers as per the Labour Law.
- viii- The completion of work will be gauged by the technical Engineering team of WWF-Pakistan.
- ix- The vendor will be responsible for any fault in the work.
- x- The vendor will not sublet the work to any 3rd party.



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FERAZEPUR ROAD LAHORE

Annex-B

Format of Financial Proposal

i) Financial Proposal for required Goods/Services as per following details: -

Sr. #	ITEMS	Unit	QUANTITIES	Unit Rate	Total Amount Without Taxes
a. Construction of Gabion Protection Bund					
1	Excavation (foundation of Gabion Wall)	cft	5000		
2	Skilled Labour for the construction of Gabion Wall)	Person	150		
3	Unskilled Labour for the construction of Gabion Wall	person	150		
4	Hot dip Galvanized Iron Wire with 250 g/sq-meter zinc coating and Standard Wire Guage (SWG)- # 8 (0.16 Inches or 4.064mm Dia)	Sft	18200		
5	Stone (hard stone 1.5 length, 10" thickness)	load	419		
6	Pick axe (2.5' wooden handle, 1.5 kg weight)	NO	8		
7	Hammer (5kg weight)	NO	8		
8	Layout rope (3mm macrame rope)	Rft	466		
b. Rehabilitation of Irrigation Channel					
1	Unskilled Labour Charges for Excavation of foundation(channel)	Cft	6000		



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FERAZEPUR ROAD LAHORE

	600' x 3' x 2'				
2	Askari Cement Ordinary Portland Cement (50kg)	Bags	502		
3	Sand Tractor Load Sand Tractor Load 63 cft (6'x4.2'x2.5')	Trips	30		
4	Coarse Aggregate (16mm to 20mm) (6'x4.2'x2.5')	Trips	60		
5	Concrete mini mixer Machine	hours	80		
6	shuttering Steel Plate 3' x 5'	No.s	18		
7	Unskilled Labour Per day	days	140		
8	Skilled Labor Per day	days	140		
9	Transportation of cement Askari 50kg/ bag	Truck/Trips	1		
c. Construction of Storage Tank					
1	Cement Askari Cement @ 50kg/bag	Nos	167		
2	Sand Sand Tractor Load @ 50 cft/load	Load	12		
3	Coarse Coarse Aggregate (16mm to 20mm) @50cft/load	Load	4		
4	Stone Stone Tractor Load @45cft/load	Load	26		
5	Gate Valve 90 mm Gate Valve for Washout (90mm)	Nos	1		
6	Gate Valve 63 mm Gate Valve to regulate supplies (63mm)	Nos	1		
7	Skilled Labour	Nos	70		



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FEROZEPUR ROAD LAHORE

8	Unskilled Labour	Nos	70		
9	Transportation cost Transportation of cement Skardu to Kondos Ghanche Mazada	trip	6		
10	HDPE Pipe 50 mm HDPE Pipe 50 mm for school	feet	2000		
11	HDPE Pipe 32 mm HDPE Pipe 32 mm for school	feet	1000		
d. Fruit Tree and Fodder Seed Distribution					
1	Cheery 3 years, and 5 feet height grafted with transportation cost	No	200		
2	Walnut 5 feet height local with transportation cost	No	200		
3	Apple 3 years, and 5 feet height grafted with transportation cost	No	200		
4	Alfalfa Seed	Kg	180		
Total Exclusive of taxes					
GST %					
Grand Total Inclusive of All taxes (DDP Basis)					
Retention money 5% of Grand Total inclusive of all taxes					



WORLDWIDE FUND FOR NATURE
HEAD OFFICE, FERAZEPUR ROAD LAHORE

Payment Terms:

Following Payment, the terms shall be followed:

Advance Payment Upon Signing of Contract (Milestone 1)	25 %
Excavation for foundation and damping construction material of irrigation channel and Gabion Wall, provision of the GI wire & GI Wire quality test report from PCSIR by the vendor. (Milestone 2)	30%
Delivery of fruit trees, HDPE Pipe and completion of Storage Tank and submission of satisfactory inspection report from technical team of WWF-Pakistan (Milestone 3)	40%
Retention Money after completion of O&M period of 6 months	5 %
"The contractor shall furnish a Performance Security in the form of an unconditional Bank Performance Guarantee equivalent to 10% of the contract price."	

- a) The Contract request(s) for payment shall be made to the WWF-Pakistan in writing, accompanied by an invoice, and delivery challans/Inspection Reports describing, as appropriate, the materials delivered upon the fulfillment of other obligations stipulated in the Contract.
- b) The currency of payment is Pak. Rupees.
- c) All Taxes shall be deducted as per the Laws of Government of Pakistan
- d) If there is any Exemption on Taxes. Exemption Letter shall be provided along with the Financial Proposal.
- e) The payment terms are provisional/tentative and subject to revision by WWF-Pakistan at the time of contract execution.
- f) The selected vendor shall execute the vendor agreement on duly stamp paper.